


USB-4716

200 kS/s, 16-Bit, 16-Ch Multifunction DAQ USB Module

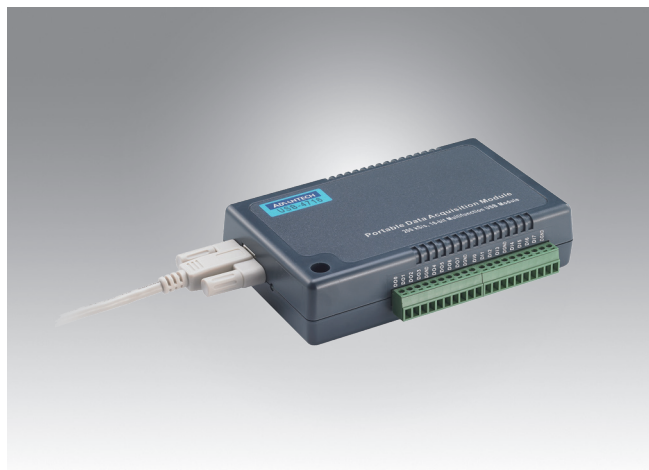

Features

- Supports USB 3.0 SuperSpeed
- Portable
- Bus powered
- 16 x Analog input channels
- 16-bit resolution analog input
- Up to 200 kS/s sampling rate
- 8-ch Digital input/8-ch digital output, 2-ch analog output, and 1 x 32-bit counter
- Detachable screw terminal on modules
- Suitable for DIN rail mounting
- 1 x Lockable USB cable included for connection security

Introduction

The USB-4700 series comprises plug-and-play DAQ modules that can be installed without opening the chassis; simply plug in the modules to access collected data. Reliable and rugged enough for industrial applications, yet sufficiently affordable for home systems, USB-4700 series modules provide an easy and efficient means of adding measurement and control capabilities to USB-capable computers.

USB-4716 offers 16 single-ended/8 differential analog inputs with 16-bit resolution, up to 200 kS/s throughput, 16 digital I/Os, 1 user counter, and 2 16-bit analog outputs. Additionally, because USB-4716 draws power from the computer via the USB port, no external power connection is required, making this module a most cost-effective solution for diverse testing and measurement applications.

Specifications

Analog Input

- **Channels** 16 Single ended/ 8 differential (software programmable)
 - **Resolution** 16 bits
 - **Max. Sampling Rate** 200 kS/s
- Note: The sampling rate of each channel is influenced by the number of used channels. For example, if 4 channels are used, the sampling rate will be $200\text{k}/4 = 50\text{ kS/s}$ per channel.
- **FIFO Size** 1,024 samples
 - **Overvoltage Protection** 30 Vp-p
 - **Input Impedance** 1 G Ω
 - **Sampling Modes** Software, onboard programmable pacer, or external
 - **Input Range and Absolute Accuracy**

Single Ended	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Differential	± 10	± 5	± 2.5	± 1.25	± 0.625
Absolute Accuracy (% of FSR)*	0.015	0.03	0.03	0.05	0.1

* ± 1 LSB is added as the derivative for absolute accuracy

Analog Output

- **Channels** 2
- **Resolution** 16 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

Internal Reference	Unipolar	0 ~ 5, 0 ~ 10
	Bipolar	$\pm 5, \pm 10$

- **Slew Rate** 0.125 V/ μ s
- **Driving Capability** 5 mA
- **Output Impedance** 0.1 Ω max.
- **Operation Mode** Single output
- **Accuracy** Relative: ± 1 LSB

Digital Input

- **Channels** 8
- **Compatibility** 3.3 V/5 V/TTL
- **Input Voltage** Logic 0: 1.0 V max.
Logic 1: 2.0 V min.

Digital Output

- **Channels** 8
- **Compatibility** 3.3 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.
Logic 1: 2.4 V min.
Sink: 6 mA (sink)
Source: 6 mA (source)
- **Output Capability**

Event Counter

- **Channels** 1
- **Compatibility** 3.3V/TTL
- **Max. Input Frequency** 1 kHz

General

- **Bus Type** USB 3.0
- **I/O Connector** Onboard screw terminal
- **Dimensions (L x W x H)** 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")
- **Power Consumption** Typical: 5 V @ 360 mA
Max.: 5 V @ 450 mA
- **Operating Temperature** 0 ~ 60 °C (32 ~ 158 °F)
- **Storage Temperature** -20 ~ 70 °C (-4 ~ 158 °F)
- **Operating Humidity** 5 ~ 85% RH non-condensing
- **Storage Humidity** 5 ~ 95% RH non-condensing

Ordering Information

- **USB-4716-BE** 200 kS/s, 16-bit, 16-ch multifunction DAQ USB module

Accessories

- **1960004544** Wall mount bracket
- **1960005788** VESA mount bracket