IDK-1110WP

10.1" WXGA Industrial Display Kit with **Touch Solution**



Features

- 10.1" 1280 x 800 pixels LCD (Normally Black)
- Wide view angle: 85°/85°/85°/85°
- Wide operating temperature
- High brightness of 500 cd/m²
- Build in LED driver
- Projected capacitive touch
- COF touch controller (USB)
- Anti-Reflector surface treatment (Cutomized request)
- Optical bonding (Cutomized request)




Introduction

The Advantech IDK-1110WP series comes with a 10.1" industrial grade LCD display and project capacitive to the The series is also available with flexible options for LCD screens enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-1110WP series is ideal for embedded applications which customers have maximum flexibility for mechanical decig.

Specifications

	LCD Panel	Display Size	10.1", 16:10
		Resolution	1280 x 800 (WXG.\)
		Viewing Angle (U/D/L/R)	88°/88°/88°,8°
		Brightness	501 cd/m-
		Backlight Life	50,0,10hrs
		Contrast Ratio	800:1
		Response Time	25 ins
		Colors	6 bit (262K)/8 bit (16.2 M)
		Voltage	5 V
		Consumption	6 W
		Signal Interface	LVDS
		Weight	300 g
		Dimensions (W x H x D)	230.7 x 152.55 x 6.5 mm
	Touchscreen	Touch Screen	Projected capacitive
		Transparency	$90 \pm 3\%$
		Interface	USB
		Surface Treatment	Clear
		Surface Hardness	Mohs 5H
	Environment	Operating Temperature	-30 ~ 80 °C (Panel Surface temperature)
		Storage Temperature	-30 ~ 85 °C

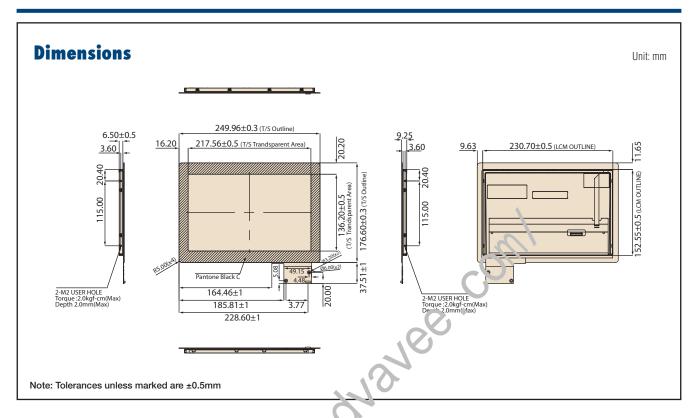

Ordering Information

Part No.	Size	LCD Panel Briggtness (cd/m²)	Interface	Touch Screen	Touch Interface
IDK-1110WP-50XGB2	10.1"	500	LVDS	Project capacitive	USB

Packing List

Part Number	Description
1700027288-01	1 x USB cable 180cm

Note: Package contents are subject to change without prior in tice

Optional Order

SBC Part No.	LVDS/BL cable P/N	Display interface	Color depth		Touch power input
MIO-5272	1700034678-01	LVDS	6bit	USB	5V
AIMB-217	1700034683-01	LVDS	8bit	USB	5V

Note: Package contents are subject to change without prior notice