FPM-3191G

9U Rackmount, 19" SXGA Industrial **Monitor with Resistive Touch Control, Direct VGA, and DVI Ports**



Features

- 19" SXGA TFT LED LCD with 50K backlight lifetime
- Robust design with stainless steel chassis and aluminum front panel
- Anti-glare screen with tempered glass and IP65-certified front panel
- Lockable OSD control pad on rear cover
- Supports 24 V_{DC} power input
- Supports panel, wall, desktop, rack, or VESA arm mounting
- Supports 9U pre-drilled rackmount mounting holes







Introduction

FPM-3191G is a 19" color TFT LCD flat panel monitor specifically designed for industrial applications. With a display size of 19", FPM-3191G provides an adequate display area with sharp and vivid images. The monitor also supports direct VGA signal transmissions, allowing users to upgrade 💆 displays without altering the existing infrastructure. The provision of OSD function keys makes it easy to adjust the onscreen display. Furthermore, the stainless steel chassis and IPE 3-rated aluminum front panel ensure suitability for industrial applications.

Specifications

General

Enclosure

OSD Controls OSD control pad on front panel Certification BSMI, CCC, CE, FCC Class A, UL Dimensions (W x H x D) 482 x 399.2 x 67 mm (18.98 x 15.71 x 2.64 in)

> Front panel: Aluminum with coating Rear cover: Stainless steel chargis

Mount Options Panel, wall, desktop, VESA arm, and 19" rackmount

 Power Input Phoenix Jack: 24 Vpc inp. t

Power Consumption 18 W + 20% Video Port VGA & DVI-D t Weight (Net) 10.65 kg (22 46 lb.)

LCD Display

Display Type SXGA TFT LCD with LED backlight

 Display Size 1280 x 1024 Max. Resolution Max. Color 16.7M Viewing Angle (H/V °) 170/160 Luminance (cd/m²) 350 Backlight Life 50.000 hr Contrast Ratio 1000:1

Touchscreen

Driver Penmount 6000 Interface RS-232 and USB

35 million touches at a single point Lifespan

Light Transmission

OS Support Windows XP,2000, Vista, 7,8/8.1,10, XP/7/8/10

Embedded, CE, Linux Power Consumption +5 V @ 100 mA Touch Resolution Linearity

Invironment

Operating Temperature $-20 \sim 60 \,^{\circ}\text{C} \, (-4 \sim 140 \,^{\circ}\text{F})$ **Storage Temperature** $-30 \sim 80 \,^{\circ}\text{C} \, (-22 \sim 176 \,^{\circ}\text{F})$ **Humidity (Storage)** 90% @ 50 °C non-condensing IP Rating Front panel is IP65 compliant Vibration 5 ~ 500 Hz, 1 Grms (Operating, Random)

Ordering Information

 FPM-3191G-R3BE 19" SXGA Ind. Monitor w/ Resistive TS (Combo)


Optional Accessories

1702002600 Power Cable US Plug 1.8 M 1702002605 Power Cable EU Plug 1.8 M 1702031801 Power Cable UK Plug 1.8 M


1700000596-11 Power Cable China/Australia Plug 1.8 M

(Direct rack mounting, no need accessory)

PWR-247-DE Adapter 100-240V 60W 24V 2.5A FPM-7000G-ADKE Adapter bracket for FPM-7000 4:3

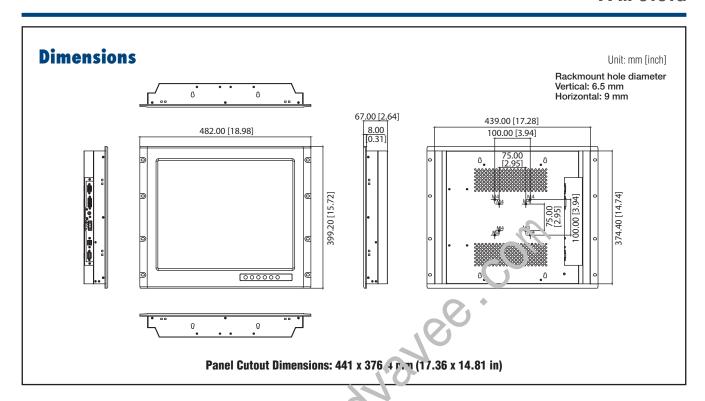

I/O View



Packing list

Item	Part No.	Description	Qty
Mounting kit	1962315210	HOOK BRACKET (FOR FPM-3150TV)	1
Mounting kit	1962317070	FIX BRACKET (FOR FPM-3175TV) A1	2
Mounting kit	19623190A0	MOUNT BRACKET (L) (FOR FPM-3190TV) A1	1
Mounting kit	19623190B0	MOUNT BRACKET (R)(FOR FPM-3190TV) A1	1
Mounting kit	193B040600	Step Screw M4x8.2L(6L) F/S D=8 H=1.5 - Cu Ni	4
Mounting kit	1935063530	Screw M6*35L R/S D=10.5 H=4.0 (3+) ST BIZn	4
Mounting kit	1964000010	COMPRESSION SPRING MiPC-50/52 DRAW:M1331311	4
GND cable	1703011001-11	A Cable G-TEM. 100CM C=GR/Y PPC-55	1
VGA cable	1700021332-01	M CABLE D-SUB 15P(M)/D-SUB 15P(M) 180CM VESA B1	1
USB touch Cable	1700017851-01	M Cable USB-A(M)/USB-B(M) 180CM black color	1
RS232 cable	1700091800	M Cable D-SUB 9P(M)/D-SUB 9P(F) 183CM	1
Terminal Block	1652007930-01	Plug-In Block 1x3P/5.08mm/PA66/F/VA/Sn/GR/H15.0 (24Vpc only)	1
Cable lock for adapter	1930001361	Screw M3x4L S/S D=5 H=1.2 (2+) ST Ni NK	14
Cable lock for adapter	1960049101N000	BRACKET PLUG FOR FPM-3121G	1
Rack hole cover	1999000600	Screwhole Plug for AWS-8259 front panel A	8