

MIC-710AIT

AI Inference System Based on NVIDIA® Jetson™ TX2 NX



Features

- Fanless compact design
- Embedded with NVIDIA® Jetson™ TX2 NX up to 1.33 TOPS
- Supports 2 x GbE, 1 x USB 3.0, 1 x USB 2.0
- Supports 1 x mPCIe, 1 x M.2 2280 (SATA interface)
- Supports Allxon 24/7 remote monitoring and OTA deployment; Azure Certified Devices




Specifications


		Jetson TX2 NX
Processor System	CPU	Dual-core NVIDIA Denver 2 64-bit CPU and quad-core ARM A57 Complex
	GPU	256-core NVIDIA Pascal GPU
	Memory	4GB LPDDR4
	Flash	16G of eMMC
I/O	Ethernet	2 x 10/100/1000 Mbps
	Display	HDMI (Max. resolution 3840 x 2160 @ 60Hz)
	USB	Internal: 1 x USB 2.0 External: 1 x USB 2.0, 1 x USB 3.0
	DI/DO	4-ch DI, 4-ch DO
	COM	Internal: 1 x RS-232 pin header External: 1 x RS-232/RS-422/RS-485
	OTG USB	1 x Micro USB (Internal)
Expansion	Mini PCIe	1 x mPCIe (Signal: PCIe + USB)
	SIM	1 x Nano SIM slot
	iDoor (Optional)	1 x iDoor bracket reserved
Storage	Storage	1 x Micro SD slot 1 x M.2 2280 (M-Key, signal: SATA3) 1 x SATA3 connector
	Power	Type Terminal block, 2-pin, AT Input Voltage 19-24 V _{DC} , 1.5A-1.18A
Environment	Operating temperature	MODE 3 15W 6CORES: -10 ~ +60 °C with 0.7 m/s airflow
	Operating humidity	95% @ 40 °C; 104 °F (non-condensing)
	Vibration	3 Grms @ 5 ~ 500 Hz, random, 1 hr/axis
	Shock	10G / 11 ms
Mechanical Specifications	Dimensions (W x D x H)	147 x 118 x 52 mm (5.7" x 4.6" x 2")
	Weight	1.2 kg (3.5 lb)
	Installation	Desktop / DIN-rail
BSP	Jetpack	4.6
Certifications		CE/FCC/BSMI/CCC (No RED certification)

Dimensions


Unit: mm

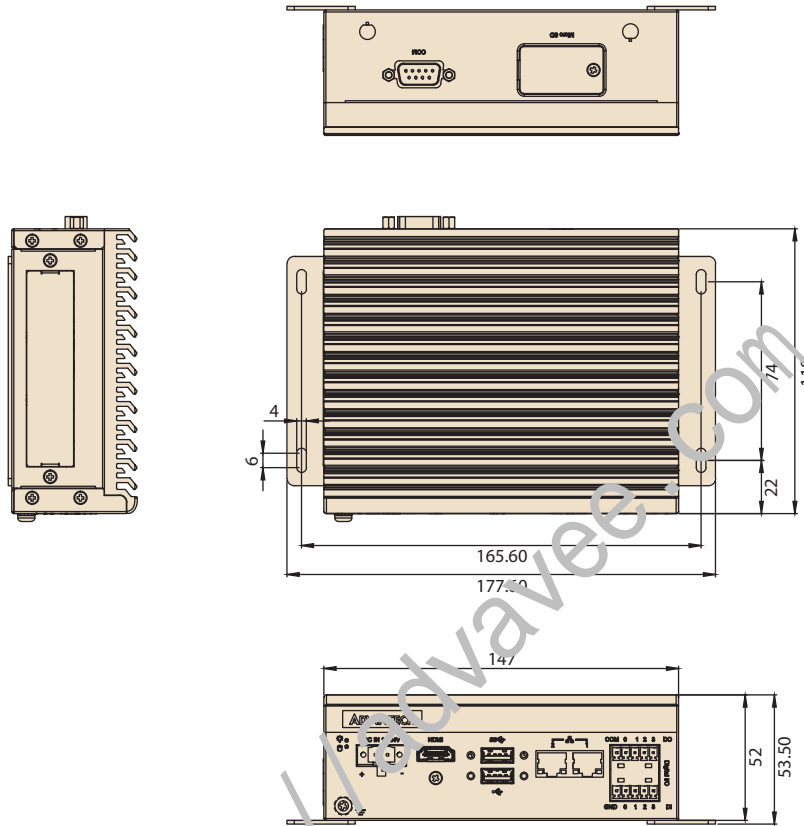


Front View

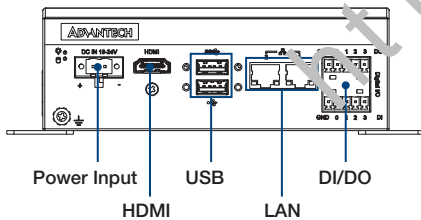

Rear View

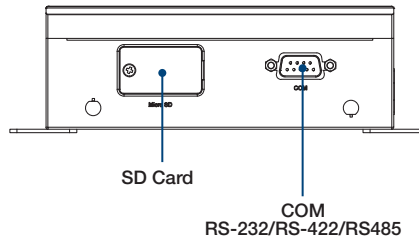

Side View



Ordering Information

Part Number	NVIDIA Module	Memory	eMMC
MIC-710AIT-00A1	TX2 NX	4G	16G

Packing List

Part Number	Description	Quantity
1652002202	Power connector-2Pin	1
1652005204	DI/DO connector-5Pin	2
1700023619-01	Micro USB cable for system recovery	1
1960095312N001	Mounting bracket	2
1930008089	Mini PCIe screw	2
1930005673-11	M.2 screw	1

Optional

Part Number	Description
96PSA-A65W19P2-1	Power Adapter 100-240V 65W 19V
1700001524	Power Cord UL 3P 10A 125V 183cm (US)
170203183C	Power Cord EU 3P 2.5A 250V 183cm (EU)
170203180A	Power Cord BSI 3P 2.5A 250V 183cm (UK)
1702031836	Power Cord SAA 3P 10A 250V 183cm (AU)
1700008921	Power Cord PSE 3P 7A 125V 183cm (Japan)
1700019146	Power Cord CCC 3P 2.5A 250V 183cm (China)
98R1750020E	DIN-rail bracket kit
1960065854N001	PCM series module bracket
98RV710AL00	Allxon OOB module