


PCE-3032

LGA1200 10th Gen Intel® Core™ i9/i7/i5/i3 Half-size SHB with PCIe 3.0/ Dual Independent Display/Dual GbE LAN/ SATA III/USB 3.2

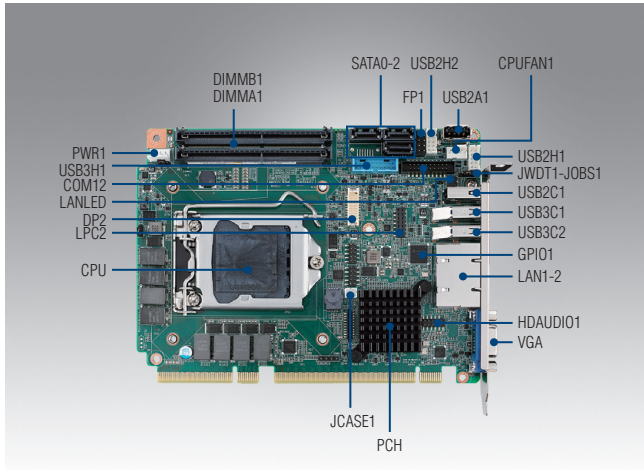

CE FCC


Features

- Complies with PICMG 1.3
- Supports Intel® Core™ i9/i7/i5/i3/Celeron®/Pentium® processor with H420E chipset
- Dual Channel (Non-ECC) DDR4 2666/2933 up to 64 GB
- Supports USB 3.2, SATA III, PCIe 3.0
- Supports CRT and DVI-D/DP (optional) display
- Supports Advantech TPM module (optional)
- Supports WISE-DeviceOn and embedded software APIs

Specifications

Processor System	CPU	I9-10900E	I9-10900TE	I7-10700TE	I7-10700E	I5-10500E	I5-10500E	I5-10500TE	I3-10100E	I3-10100TE	G6400E	G5900E	G5900TE
	Speed	2.80GHz	1.80GHz	2.00GHz	2.90GHz	3.10GHz	3.10GHz	2.30GHz	3.6GHz	2.30GHz	3.80GHz	3.20GHz	3.00GHz
	L3 Cache	20MB	20MB	16MB	16MB	12MB	12MB	12MB	6MB	6MB	4MB	2MB	2MB
	Cores	10	10	8	8	6	6	6	4	4	2	2	2
	TDP	65W	35W	35W	65W	65W	65W	35W	65W	35W	58W	58W	35W
	SKU/Chipset	H420E											
	BIOS	AMI 128Mbit SPI Flash											
Bus	PCI-Express	One x16 (Gen 3) plus four x1 (Gen 3) to backplane											
	Technology	Dual channel (Non-ECC) DDR4 2666/2933 up to 64GB											
Memory	Max. Cap.	64 GB (32 GB per DIMM)											
	Socket	DDR4 260-pin SO-DIMM x2											
	Controller	Chipset integrated Intel® HD Graphics											
Graphics	VRAM	Shared system memory is subject to OS											
	VGA	Supports resolution up to 2048 x 1152 pixel at 60Hz											
	Display Port	Supports resolution up to 4096 x 2160 pixel at 60Hz											
	DVI-D	Supports resolution up to 1920 x 1200 pixel at 60Hz											
	Dual Independent Display	VGA+ DVI-D/DP (Optional)											
Ethernet	Interface	10/100/1000 Mbps											
	Controller	LAN 1: Intel I210-AT LAN 2: Intel I210-AT											
	Connector with LED	RJ-45 x 2											
Rear I/O	USB 3.2	2											
	USB 2.0	1											
	Ethernet	2											
	VGA	1											
Internal Connector	USB	5 USB 2.0 (Pin-header *4 + USB Type A *1); 2 USB 3.2 (Pin header)											
	SATA	SATA III x3 (600MB/sec)											
	mini-PCIe	0											
	DVI-D	1											
	DP	1											
	COM	2 (RS-232)											
	GPI0	8 bits											
Watchdog Timer	Output	System reset											
	Interval	Programmable 1-255 sec											
Miscellaneous	Audio	Intel High Definition audio interface (required an audio extension module P/N: PCA-AUDIO-HDB1E)											
Power Requirement	Test Environment	CPU: Intel® Core™ i7-10700E CPU @2.90GHZ, DRAM: 4GB SO-DDR4-2666*2											
	Voltage	+V12			+V5_SB			+V3.3			+V5		
	Current	4.36A			0.17A			1.8A			2.13A		
Environment	Temperature/Humidity	Operating						Non-operating					
		0 ~ 60 °C (32-140 °F); Depends on CPU frequency and cooler solution						-40 ~ 85 °C and 60 °C @ 95% RH					
Physical	Dimensions (L x H)	Operating humidity: 40 °C @ 85% RH Non-Condensing											
		Non-Condensing											

Block Diagram

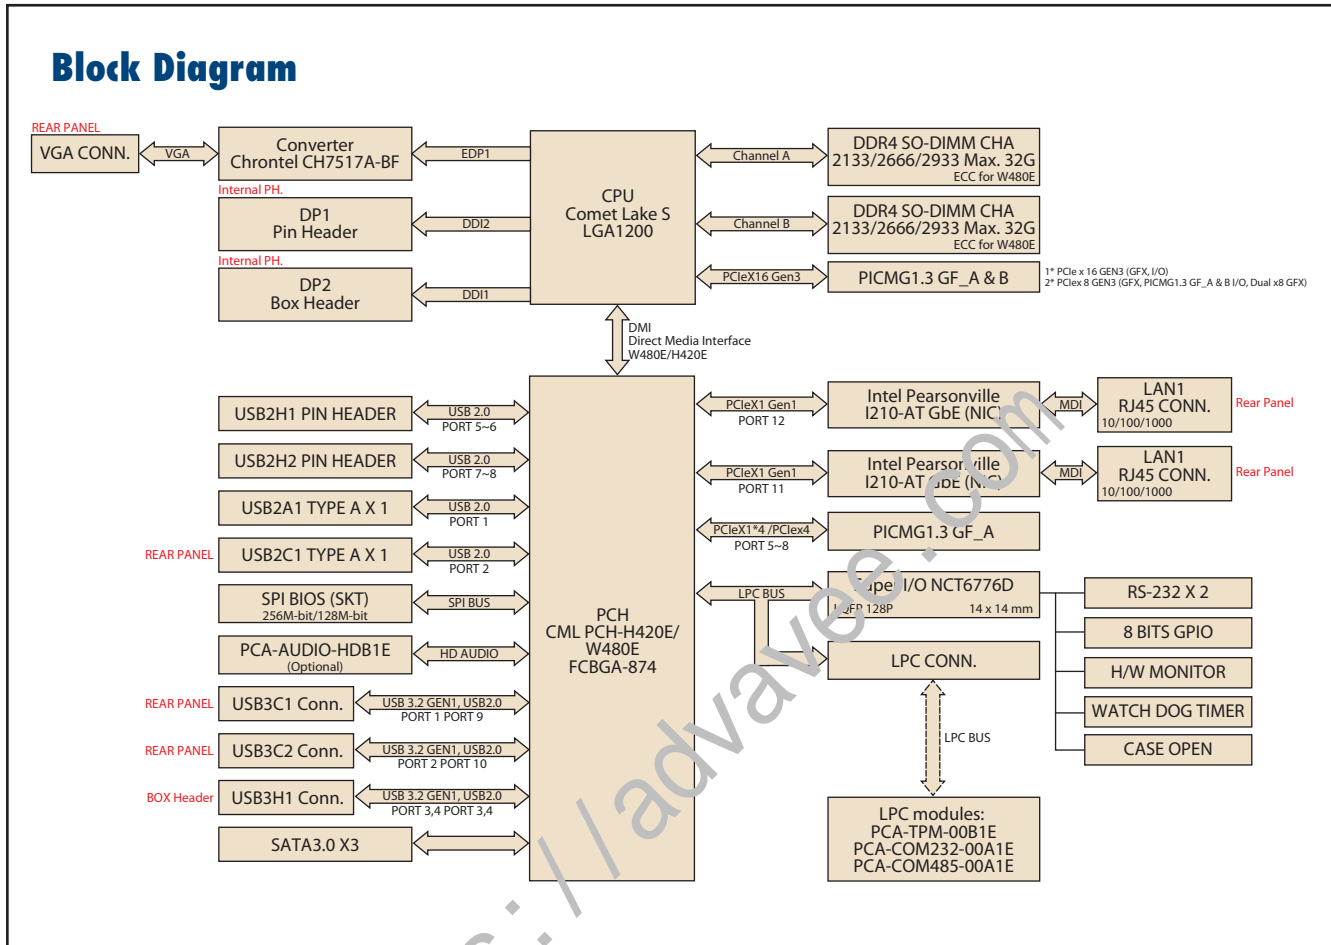

Ordering Information

Part Number	PCH	Memory	Backplane	LAN	VGA	DVI-D	DP	COM	SATA III	mini-PCIe	USB 2.0	USB 3.2	S/W RAID	AMT
PCE-3032G2-00A2	H420E	Non-ECC	PCE-3BXX	2	1	1*	1**	2 RS-232 4 RS-422/485 or 4 RS-232 (optional)***	3	0	6	4	No	No

* DVI-D cable (1700021831-01) is optional.

** PCE-SA01-00A1E is required.. PCE-SA01-00A1E is compatible with IPC-3026/IPC-6806S/ACP-4D00/ACP-4020, but not compatible with IPC-3012.

***PCA-COM485-00A1E is required for additional 4 RS422/485; PCA-COM232-00A1E is required for additional 4 RS232.

Packing List

Part Number	Description	Quantity
1700003194	Serial ATA HDD data cable	x1
1700008762	2-port COM cable	x1
1703040100	B4P to 4P power cable	x1
2041303201	Startup manual	x1

Optional Accessories

Part Number	Description
*PCA-COM485-00A1E	4 x RS-422/485 module
PCA-COM232-00A1E	4 x RS-232 module
PCA-AUDIO-HDB1E	Audio module with Realtek ACL892
PCA-TPM-00B1E	TPM 2.0 module
PCE-SA01-00A1E	IO extension module
1700021831-01	DP to DVI-D cable w/ BKT
1960053065N001	CPU cooler for 1U Chassis and 55W TDP
1960053207N001:	CPU cooler for 1.5U Chassis and 65W TDP
1960050255N001/	CPU cooler for 2U Chassis and 95W TDP
1960077101N001	CPU cooler for 2U Chassis and 95W TDP

*for COM-422 module, BIOS auto-flow need to be set at disable

Bracket View



PCE-3032G2-00A2