

# EKI-7712E-4F

# EKI-7712E-4FI

## 8FE+4G SFP Port Managed Redundant Industrial Switch



### Features

- 8 x Fast Ethernet ports + 4 x SFP ports
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function for fast deployment
- Security Pack with 802.1X, ACL, RADIUS, TACACS+, MAB Authentication, SNMPv3, HTTPS, SSH, and SFTP
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- Supports NMS for easy and visualized to monitor and manage network remotely
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 x relay output

### Introduction

The EKI-7712E-4F and EKI-7712E-4FI provide abundant port options for connecting to various different device types, with 8 fast Ethernet ports and 4 SFP (mini-GBIC) ports. These units are embedded with Advantech's IXM function for fast deployment, which can dramatically save on engineering time and costs. The EKI-7712E series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, the series are equipped with X-Ring Pro, which can achieve ultra-high-speed recovery times of <20 ms, thus ensuring network stability. The EKI-7712G-4FI features a wide operating temperature of -40 to 75 °C and NEMA TS2 rating, making it ideal for use in traffic applications. Both switches comply with EN50121-4 European railway standard requirements for emissions and railway platform and trackside deployment.

### Specifications

#### Interfaces / Communications

- **I/O Port**
  - 8 x 10/100BASE-T/TX RJ-45
  - 4 x SFP (mini-GBIC) port
  - Auto-Negotiation, Full/Half Duplex Mode
  - Auto MDI/MDI-X Connection
- **Standards**
  - IEEE 802.3 for 10Base-T
  - IEEE 802.3u for 100Base-T(X)/FX
  - IEEE 802.3z for 1000Base-SX/LX/LHX/ZX
  - IEEE 802.3x for Flow Control
- **Console port**
  - RS-232 (RJ45)
- **Power Connector**
  - 6-pin screw Terminal Block (including relay)

#### Physical

- **Enclosure**
  - Metal Shell
- **Protection Class**
  - IP 40
- **Installation**
  - DIN-Rail, Wall-mount
- **Dimensions (W x H x D)**
  - 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

#### LED Indicators

- **System LED**
  - PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED**
  - Link / Speed / Activity

#### Environment

- **Operating Temperature**
  - 40 ~ 75°C (-40 ~ 167°F) (EKI-7712E-4FI)
  - 10 ~ 60°C (-40 ~ 140°F) (EKI-7712E-4F)
- **Storage Temperature**
  - 40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity**
  - 5 ~ 95% (non-condensing)
- **Overload Current Protection**
  - Present
- **Reverse Polarity Protection**
  - Present
- **MTBF**
  - 1,377,597 hours

#### Power

- **Power Consumption**
  - 12.1W @ 48V<sub>DC</sub> (System)
- **Power Input**
  - 12 ~ 48 V<sub>DC</sub>, redundant dual power input
- **Fault Output**
  - 1 Relay Output

#### Certification


- **Safety**
  - UL 61010-2-201, EN LVD 62368
- **EMI**
  - CE, CISPR 32, FCC Part 15B Class A
- **EMS**
  - EN 61000-4-2
  - EN 61000-4-3
  - EN 61000-4-4
  - EN 61000-4-5
  - EN 61000-4-6
  - EN 61000-4-8
- **EMC**
  - EN 61000-6-2
  - EN 61000-6-4
- **Shock**
  - IEC 60068-2-27
- **Freefall**
  - IEC 60068-2-32
- **Vibration**
  - IEC 60068-2-6
- **Traffic control**
  - NEMA TS-2
- **Railway Trackside**
  - EN 50121-4

#### Switch Properties

- **Switch Capacity**
  - 9.6Gbps
- **Transmission Rate**
  - 7.14Mpps
- **MAC Table Size**
  - 8K
- **Jumbo Frame**
  - 1,0240 Bytes
- **Packet Buffer Size**
  - 4.1Mb
- **Max. IGMP Group**
  - 256
- **Max. VLAN Group**
  - 256 (VLAN ID 1 ~ 4094)

## Dimensions

Unit: mm [inch]

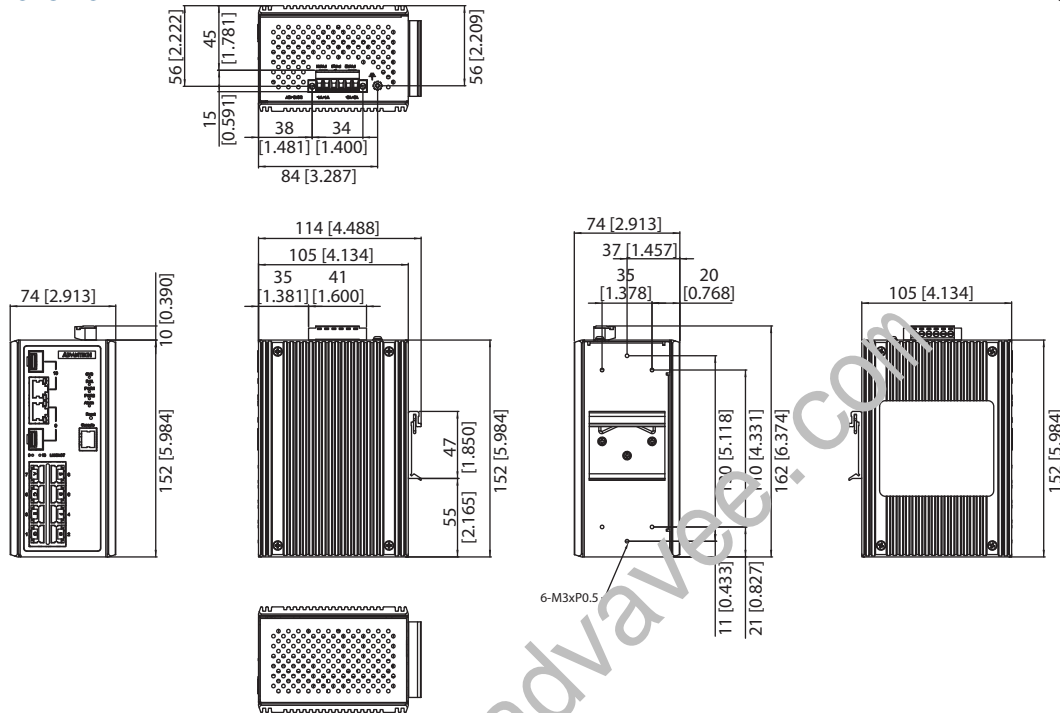

**Panel Cut-out Dimensions: 105 (4.137) x 152 (5.984) x 74 (2.91)**

### L2 Features

- VLAN Arrange** 802.1Q Tag-based VLAN, 802.1ad QinQ VLAN Stacking
- Port Mirroring** 1 to 1, N to 1  
Max. Mirror Session: 4
- RSPAN** Remote Switched Port Analysis
- GARP** GVRP, GMRP
- IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- Storm Control** Broadcast, Multicast, Unknown unicast
- LLDP** 802.1ab LLDP, LLDP-MED
- Industrial Protocol** Modbus/TCP
- Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms, ERPS(G.8032)

### QoS

- Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority, Max. Priority Queues: 8
- Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- Rate Limiting** Ingress Rate Limit, Egress Rate Limit
- Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

### Security

- Port Security** Static/Dynamic MAC, Max. Learning Limit, MAC Violation Notice
- 802.1X** Port-based/MAC-based Authentication (MD5/PEAP/TLS/TTLS Encryption)
- MAB** MAC Authentication Bypass
- Authentication** RADIUS, TACAS+
- IP Security** IP Source Guard, DHCP Snooping, ARP Spoofing Prevention
- ACL** Access Control List (IP-ACL, MAC-ACL)  
Max. ACL Entries: 128

### Management

- DHCP** Client, Server, Option66/67/82, DHCP Relay
- Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB-II, Private MIB, Ethernet-Like MIB, RMON MIB (Group 1, 2, 3, 9)
- Security access** SSH2.0, SSL
- Software upgrade** TFTP, SFTP, HTTP, Dual Image
- NTP** SNTP client

## Ordering Information

- EKI-7712E-4FI-AE** 8FE + 4SFP Port Managed Ethernet Switch w/Wide Temp
- EKI-7712E-4F-AE** 8FE + 4SFP Port Managed Ethernet Switch

Note: For SFP copper type, only 1000Mbps supported.