

EKI-9510E-2GH

EKI-9510E-2GL

EN 50155 10-port Unmanaged M12 Ethernet Switch 72/96/110 V_{DC}

EN 50155 10-port Unmanaged M12 Ethernet Switch 24/48 V_{DC}



CE FCC

Features

- Complies with EN50155
- 8 x M12 D-Coded 10/100Mbps ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Input
EKI-9510E-2GH: 72/96/110 V_{DC}
EKI-9510E-2GL: 24/48 V_{DC}
- Operating Voltage
EKI-9510E-2GH: 50.4~137.5 V_{DC}
EKI-9510E-2GL: 16.8~60 V_{DC}
- M12 connector with IP40 protection

Introduction

EKI-9500 series switch is designed for railway application, with rugged and high EMC performance. EKI-9500 series is the suitable networking solution for rolling stock and wayside applications. EKI-9500 series provide M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, to guarantee reliable operation against environmental disturbances, such as vibration and shock on train. EKI-9510E-2GH & EKI-9510E-2GL is a Ethernet switch, it provides 8 x Fast Ethernet M12 D-code interface. It also provides 2 x Gigabit Ethernet M12 X-code interface with Bypass function to increase the reliability of the network. EKI-9510E-2GH/ L features a "flat" design, can be easily deployed with its slender size and let network deployment more simple in crowded carriage/ cabinet.

Specifications

Interface

- I/O Port** 8 x 10/100Mbps M12 D-Coded + 2 x 10/100/1000Mbps M12 X-Coded with Bypass function
- Power Connector** M12 A-Coded

Physical

- Enclosure** Aluminum Shell
- Protection Class** IP 40
- Installation** Wall mount
- Dimensions (W x H x D)** 216 x 132 x 59.3 mm
- Weight** 1.5kg

LED Display

- System LEDs** PWR1, PWR2, SYS, Alarm

Environment

- Operating Temperature** -40 ~ 70°C
- Storage Temperature** -40 ~ 85°C
- Ambient Relative Humidity** 5 ~ 95% (non-condensing)

Power

- Power Consumption** 10 Watts
- Power Input** EKI-9510E-2GH: 72/96/110 V_{DC}
EKI-9510E-2GL: 24/48 V_{DC}
- Operating Voltage** EKI-9510E-2GH: 50.4~137.5 V_{DC}
EKI-9510E-2GL: 16.8~60 V_{DC}
Dual inputs Supports Overload Current Protection
Supports Reverse Polarity Protection

Certification


- EMI** FCC Part 15 Subpart B Class A
CE EN55032 (CISPR)
EN55024 Class A
- EMS** EN61000-4-2 (ESD); EN61000-4-3 (RS);
EN61000-4-4 (EFT); EN61000-4-5 (Surge);
EN61000-4-6 (CS)
- Shock** IEC 61373
- Vibration** IEC 61373
- Rail Traffic** EN 50155; EN50121-3-2

L2 Features

- L2 MAC Address** 8K
- Jumbo Frame** 9KB

Dimensions

Unit: mm [in.]

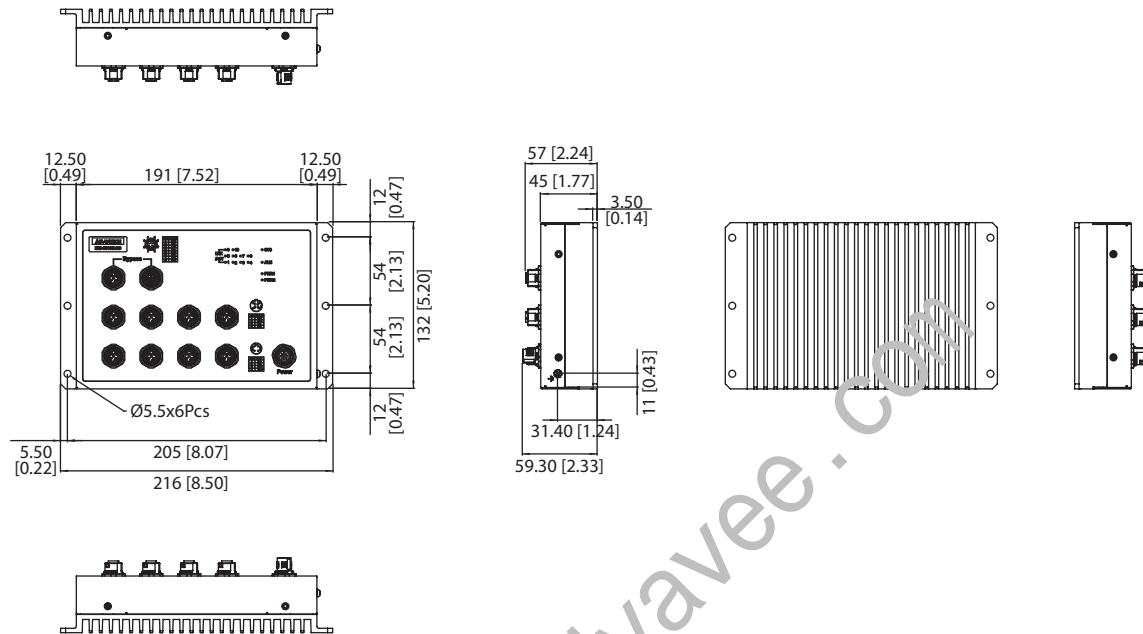

Ordering Information

- **EKI-9510E-2GH-AE** 8 x M12 D-Coded + 2 x M12 X-Coded Unmanaged Ethernet Switch, 72/96/110V_{DC} dual power input
- **EKI-9510E-2GL-AE** 8 x M12 D-Coded + 2 x M12 X-Coded Unmanaged Ethernet Switch, 24/48V_{DC} dual power input

Accessories

| PN | | Description |
|--------------------|--|--------------------------------------------------------------|
| OPT1-M12-CRP-4MD | | Phoenix Contact M12 D-code 4 pin Male crimp type connector |
| OPT1-M12-CRP-8MX | | Phoenix Contact M12 X-code 8 pin Male crimp type connector |
| OPT1-M12-CRP-4FA | | Phoenix Contact M12 A-code 4 pin Female crimp type connector |
| OPT1-M12C-4MD-150R | | M12 D-code 4 pin Male to RJ45, cable length: 1.5m |
| OPT1-M12C-8MX-150R | | M12 X-code 8 pin Male to RJ45, cable length: 1.5m |
| OPT1-M12C-4FA-100 | | M12 A-code 4 pin Female to 1m cable |
| 1990023703S000 | | M12 waterproof CAP (1pc.) |