

# HPC-2040

## Mini 4 Bay Server Tower



### Features


- Four Hot-Swap 3.5"/2.5" drive bays. (SAS 6Gb/s supported)
- One internal 2.5" HDD + one slim ODD bays
- Dual front USB 3.0 ports
- Supports 250W Flex ATX Power
- Supports Mini ITX motherboard

### Quiet Specifications



CE FCC

		External	Internal
Drive Bay	Slim Optical Drive	1	-
	2.5"	-	1
	Hot Swap	4 SASII / SATA III (3.5" or 2.5")	
Cooling	Fan	1 (12cm / 57.2CFM)	
	Air Filter	-	
Front I/O Interface	USB3.0	2	
Miscellaneous	LED Indicators	Power, LAN 1, LAN 2, HDD, and System Information	
Environment	Temperature	Operating: 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating: -40 ~ 60 °C (-40 ~ 140 °F)
	Humidity	95% @ 40 °C, non-condensing	95% @ 60 °C, non-condensing
	Vibration (5 ~ 500 Hz)	0.25G rms	
	Physical Characteristics	Dimensions (W x H x D)	210 x 200 x 275 mm (8.3" x 9.1" x 10.8")

### Front View

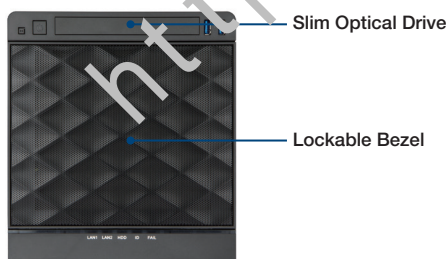


### Rear View

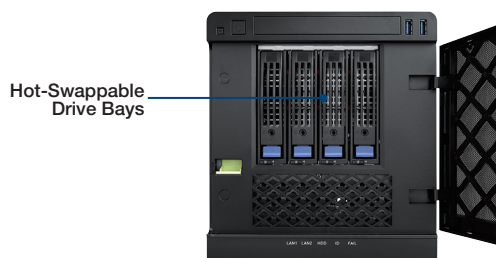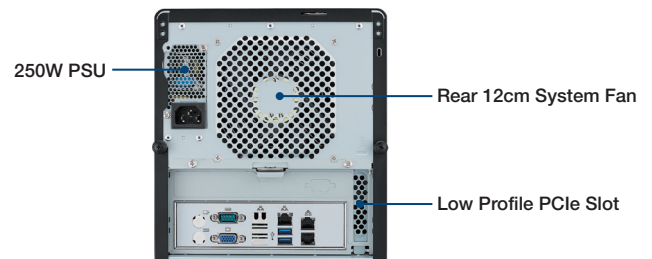

**Dimensions**

Unit: mm

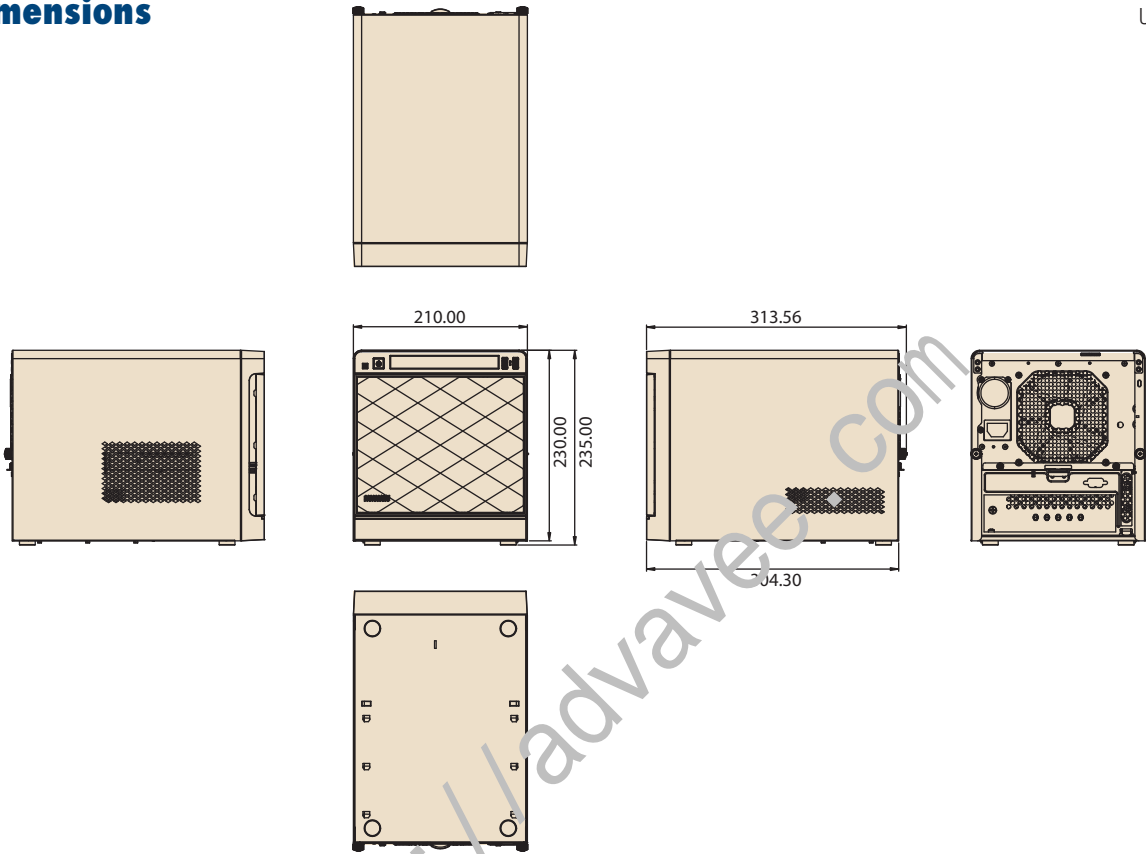

**Ordering Information**

Part Number	Description
HPC-2040-25ZX	HPC-2040 Mini Tower Chassis w/ 250W SPS

**Packing List**

Part Number	Description
PS8-250FATX-XE	250W Flex ATX Power Supply

**Optional Accessories**

Part Number	Description
1960080721N001	Atom C3000 Cooler for ASMB-260
9891831620E	4 Ports SATAIII HBA Card
96CB-SATAPOWER-6P2	SATA POWER ADAPTER 6PIN TO BIG 4 PIN(G) for Slim ODD

**Compatible Motherboard**

Part Number	CPU	Memory	10GbE Lan	GbE Lan	SATA	M.2	VGA	IPMI
ASMB-260T2-22A1	C3758	4 xDDR4 RDIMM/UDIMM	2	1	8	1	AST 2500	Yes
ASMB-260I-22A1	C3758	4 xDDR4 RDIMM/UDIMM	-	1	8	1	AST 2500	Yes