

# HPC-7000

## Server Tower Chassis for EATX/ATX/ MicroATX Motherboard



CE FCC

### Features

- Supports EATX/ATX/MicroATX motherboard with dual processors
- Three internal 3.5" HDD bays and one slim ODD drive bay
- Dual front USB 3.0 ports


### Specifications

|                          |                        | External                                       | Internal                                  |
|--------------------------|------------------------|--|---|
| Drive Bay                | Slim Optical Drive     | 1  | -   |
|                          | 3.5"                   | 3  | -   |
| Cooling                  | Fan                    | 2 (12cm/150CFM)                                |   |
|                          | Air Filter             | -  |   |
| Front I/O Interface      | USB3.0                 | 2  |   |
| Miscellaneous            | LED Indicators         | Power  |   |
|                          | Rear Panel             | Two USB reserved ports                         |   |
| Environment              | Temperature            | Operating: 0 ~ 40 °C (32 ~ 104 °F)             | Non-Operating: -40 ~ 60 °C (-40 ~ 140 °F) |
|                          | Humidity               | 95% @ 40 °C, non-condensing                    | 95% @ 60 °C, non-condensing               |
|                          | Vibration (5 ~ 500 Hz) | 1 Grms   | 2 G                                       |
|                          | Shock                  | 10 G (with 11 ms duration, half sine wave)     |   |
| Physical Characteristics | Dimensions (W x H x D) | 267.1 x 458 x 500mm (10.52" x 18.03" x 19.69") |   |


### Front View



### Rear View

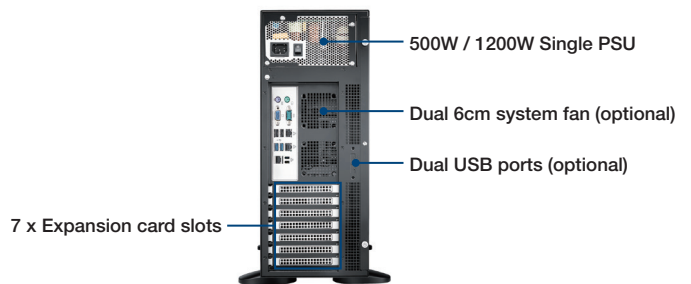


### Inside View

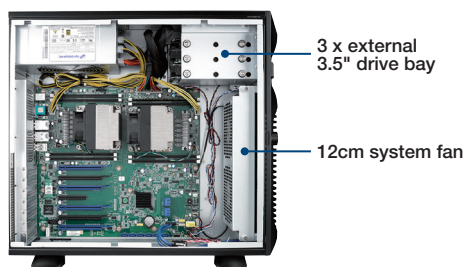

## Dimensions

Unit: mm [inch]

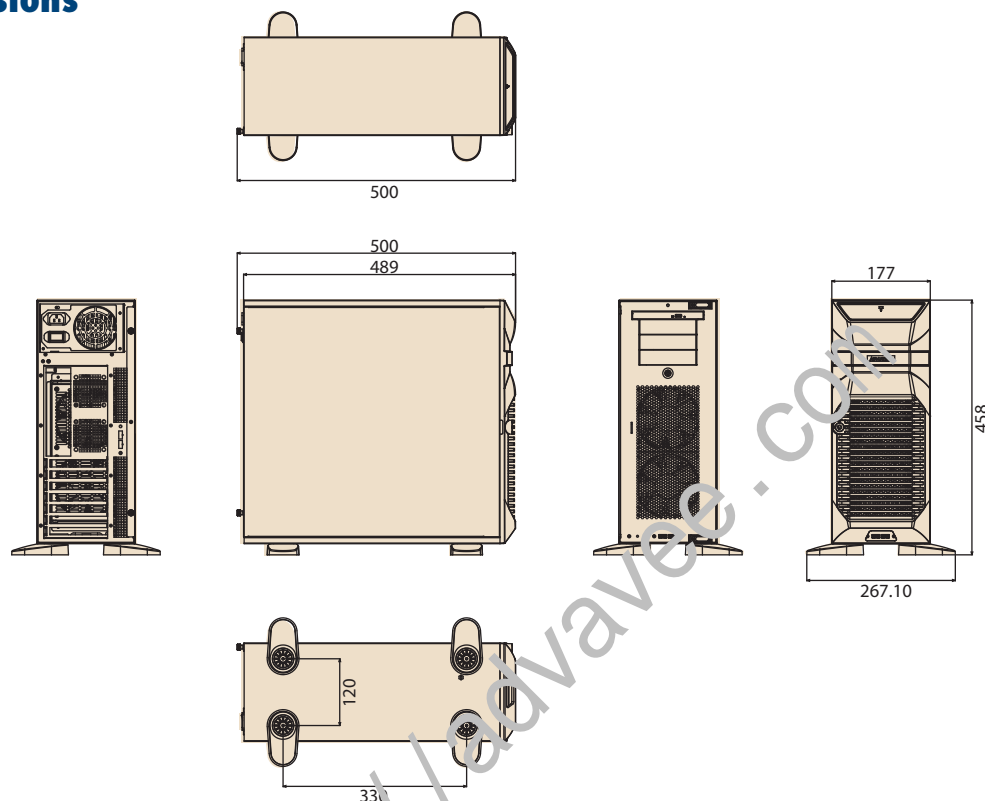

## Ordering Information

| Part Number   | Description   |
|---------------|---|
| HPC-7000-50ZB | HPC-7000 Tower chassis w/ 500W SPS  |
| HPC-7000-12ZB | HPC-7000 Tower chassis w/ 1200W SPS<br>(please purchase C19 power cord for 1200W PSU) |

## Packing List

| Part Number   | Description     | Quantity |
|---------------|-----------------|----------|
| 1750008562-01 | 12cm system fan | 2        |

Note:  
1. HPC-7000 does not support AIMB series motherboard

## Optional Accessories

| Part Number        | Description   |
|--------------------|---|
| 96CB-SATAPOWER-6P2 | SATA power wire 6-pin to big 4-pin (for slim ODD)                           |
| 989K008734         | Convert module for dual 9.6mm(H) 2.5" HDDs in a 3.5" cage                   |
| IPC-DT-3120E       | Mobile rack for converting a 3.5" drive bay to dual 9.6mm(H) 2.5" HDD trays |
| 1700026948-01      | USB 3.0 cable (30cm) for rear panel   |
| 1700011592         | USB 2.0 cable (50cm) for rear panel   |
| 1750009418-01      | 6cm system fan (20.78CFM) for rear panel                                    |

## C19 Power Cord List

| Part Number   | Description   |
|---------------|---|
| 1700021723-02 | Power Cord UL 3P 15A 125V 183cm(IEC320-C19), USA type |
| 1700023533-01 | Power Cord EU 3P 16A 250V 183cm, Europe type          |
| 1700023534-01 | Power Cord BSI 3P 16A 250V 183cm, UK type             |
| 1700023535-01 | Power Cord CCC 3P 16A 250V 183cm, China type          |
| 1700023536-01 | Power Cord PSE 3P 20A 250V 183cm, Japan type          |
| 1700033943-01 | Power Cord BSMI 3P 15A 125V 183cm, TW type            |