


PCIE-1220

Dual Port Fiber 10GbE Ethernet PCI Express Server Adapter with Intel® X710

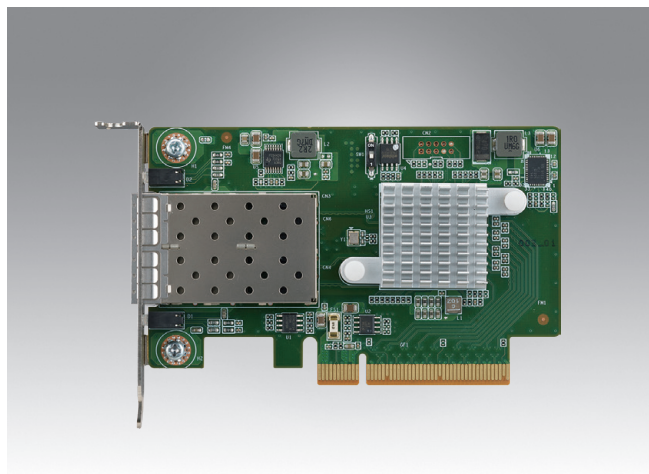

Features

- Intel® X710 Controller
- 2 10GbE SFP+ ports
- PCIe Gen.3 x8 host interface
- Advantech small form factor that is smaller than low profile form factors
- Supports 10GBASE-SR and 10GBASE-LR modules
- Supports SR-IOV based virtualization



Introduction

Advantech's PCIE-1220 is Advantech's small PCIe that is smaller than low-profile, form factors. It can be used on Advantech network appliance platforms with the quad-port 10GbE PCI Express server adapter based on Intel® X710. By supporting a PCI-Express gen.3 x8 host interface, this adapter provides sufficient bandwidth for line-rate traffic on all two 10GbE ports. Improved support for virtualization, including but not limited to VMDq and SR-IOV, makes the PCIE-1220 a perfect fit for virtualized environments and applications with network overlays. PCIE-1220 can be used to achieve high densities of network interfaces on servers and platforms for networking as well as industrial applications.

Specifications

Controller	Controller	Intel® X710
	Physical Functions	2
	Virtual Functions	64
Ethernet	PCI Express Lanes	x8
	Speed	Gen 3
	Port Number	2
	Ports	10GbE SFP+
Networking	LAN Bypass	Not supported
Power	Voltage	+12V
	Watts	8.5W
Mechanical Design	Board Dimension (D x W)	110 x 68.9 mm
	Bracket	Full height and half height options available
Environment	Operating Humidity	0 to 90% (non-condensing)
	Operating Temperature	0 ~ 55 °C (32 ~ 131 °F)
	Storage	-40 ~ 65 °C (-40 ~ 149 °F)
Certification	EMC	CE/FCC Class A
	Certification	KCC
Compatibility	OS Version	Win2012R2 / CentOS Linux release 7.3

Ordering Information

Part Number	Description
PCIE-1220PS-00A1E	Dual Port Fiber 10GbE Ethernet PCI Express Server Adapter with Intel® X710

Please contact your Advantech representative for a list of supported and validated transceiver modules.