# POC-615

# 15" Point-of-Care Terminal with 11th Generation Intel® Processor



## **Features**

- 11th generation Intel® Core™ i5/i7 processor
- 15.6" full HD display with multi-touch P-CAP control
- Multiple I/O, including USB 3.2 Gen 2 (Type A), USB 3.2 Gen 2 (Type C) with display function, and HDMI
- PCle x4, mini PCle, M.2 expansion slots for integrating add-on modules
- Fanless design with IP43-rated protection for superior hygiene and infection control
- Optional Wi-Fi, Bluetooth, RFID, smart card reader, Li-ion battery pack, and auto-focus 5 megapixel camera
- Equipped with DeviceOn software for remote device management



## Introduction

POC-615 is equipped with an integrated NVME SSD that facilitates real-time data processing and storage. Compliar with EC 60601-1 medical safety standards for electrical devices, POC-6 terminals are built for reliable operation in a wide range of healthcare environments.


Moreover, POC-615 is equipped with Advantech's DeviceOn software, which is a next-generation unified device ....anagement solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn enables easy device configuration and only when the convenient remote device management.

## **Specifications**


|                          | Processor*                  | Intel® Core™ i7-1185. TE ( ∠M cache, up to 4.40 GHz)                                  |
|--------------------------|-----------------------------|---|
| System                   | Mamary (default)            | Intel® Core™ i5 11/ 3 G/C (8M cache, up to 4.10 GHz)                                  |
| •                        | Memory (default)            | 8GB DDR4 'supp( ts' /p to 64GB DDR4 SODIMM)   |
|                          | Operating System (optional) | Windows 10 of Ent (64 bits only), Linux (supported upon request)  NVME SSD (M:2 2280) |
| Storage                  | Primary Storage (optional)  | - ()  |
|                          | Storage<br>Size             | 2.5" SA1.\ SSD available  |
| Display                  |                             |   |
| Tarrah                   | Max. Resolution             | 1920 x 1080   |
| Touch                    | Type                        | 0-point multi touch P-CAP (clear glass); optional AG/AR support upon request          |
|                          | USB 3.2 Gen 2 (Type A)      | 4 ( The Party Courts )  |
| 110                      | USB 3.2 Gen 2 (Type         | 1 (with display function)   |
| 1/0                      | HDMI                        |   |
|                          | LAN isolation, 1.5'V        | 2   |
|                          | COM (19702, 1.5KV           | 1   |
|                          | PCle x4**                   | 1 (card length: 167.65 mm/6.6 in Max)   |
| Expansion Slots          | M.2 2230                    | 1 (for Wi-Fi/Bluetooth module)  |
|                          | Mini PCle                   | 1 (full size)   |
|                          | Speaker                     | 2 x 2W  |
| Other Functions          | LED Book Light              | 2   |
| Other Functions          | Camera                      | 1 x 5 megapixel (optional)  |
|                          | TPM2.0                      | 2.0 (default via fTPM –Firmware TPM)  |
| Power Input              | DC                          | 19V, max. 150W  |
| ID Dating                | Front Panel                 | IP65  |
| IP Rating                | System                      | IP43  |
| Authentication Solution  | RFID Reader                 | Optional (choose either RFID or smart card reader)                                    |
| (Choose 1)               | Smart Card Reader**         | Optional (choose either RFID or smart card reader)                                    |
| Battery Solutions        | Backup Battery**            | Optional (choose either 1 backup battery or PClex4)                                   |
| Certification            | EMC & Safety                | Medical CE, FCC (IEC 60601-1-2, 4th edition)<br>EN 60601-1 Compliance                 |
|                          | Dimensions (W x H x D)      | 406 x 274 x 61 mm/15.98 x 10.79 x 2.4 in  |
| Physical Characteristics | VESA Mount                  | 100 x 100; 75 x 75 mm   |
| , o.ou. o.uacioouoo      | Weight                      | 4.89 kg/10.78 lb  |
|                          | Operating Temperature       | 0 ~ 35 °C/32 ~ 95 °F  |
| Environment              | Storage Temperature         | 0 ~ 50 °C/32 ~ 122 °F   |
|                          | System                      | 3 years   |
| Warranty                 | Battery Pack                | 1 year or capacity 70% and 300 cycles (whichever happens first)                       |
|                          | Dallery I aun               | i year or capacity 70 % and 500 cycles (withchever nappens IIISt)                     |

<sup>\*</sup>Intel® Celeron® processor available upon request.

<sup>\*\*</sup>Either PCle x4, smart card reader, or backup battery can be chosen.

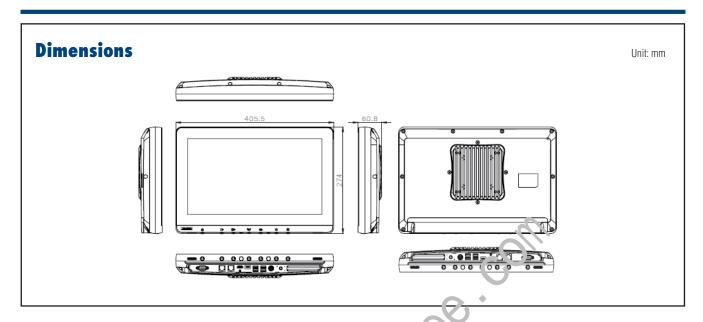

## **Front Function Keys**



- 1. Power button
- 2. Volume down/up
- 3. Touchscreen status control
- 4. Read light control
- 5. Brightness (own, 'up
- 6. RFID reader (antional)
- 7. Smart card reade. (optional) (chcure either RFID or smart card reader)
- 1. PCle x4 slot
- 2. Equipotential terminal pin
- 3. DC-in
- 4. 2 x USB 3.2 Type A
- 5. 2 x USB 3.2 Type A
- 6. 1 x USB 3.2 (Type C)
- 7. HDMI
- 8. 2 x Gigabit Ethernet 9. 1 x COM (RS-232)

# **Configuration To Order Service (CTOS)**

## **Ordering Information (Barebone Units)**

| Part Number (DC Model) | Descriptions   | CPU | RAM | Touch | SSD | RFID |
|------------------------|--|-----|-----|-------|-----|------|
| POC-615-12A111-CF      | Intel® Core i7, 8GB memory, clear glass with P-CAP touch, W/O SSD, ver F                           | i7  | 8GB | P-CAP | NA  |      |
| POC-615-12B111-CF      | Intel® Core i5, 8GB memory, clear glass with P-CAP touch, W/O SSD, ver F                           | i5  | 8GB | P-CAP | NA  |      |
| POC-615-12A111R-CF     | Intel® Core i7, 8GB memory, 1 x COM 1.5KV, clear glass with P-CAP touch, W/O SSD, with RFID, ver F | i7  | 8GB | P-CAP | NA  | Yes  |
| POC-615-12B111R-CF     | Intel® Core i5, 8GB memory, 1 x COM 1.5KV, clear glass with P-CAP touch, W/O SSD, with RFID. ver F | i5  | 8GB | P-CAP | NA  | Yes  |

## **Component Offerings**

## Memory

| Part Number        | Description              |
|--------------------|--------------------------|
| SQR-SD4N4G3K2SNEFB | DDR4 3200 4GB 1.2v 512x8 |
| SQR-SD4N8G3K2SNBCB | DDR4 3200 8GB 1.2v 1Gx8  |
| SQR-SD4N16G3K2SNCB | DDR4 3200 16GB 1.2v 1Gx8 |
| SQR-SD4N32G3K2SNAB | DDR4 3200 32GB 1.2v 2Gx8 |
| SQR-SD4I4G3K2SNEFB | DDR4 3200 4GB 1.2v 512x8 |
| SQR-SD4I8G3K2SNBCB | DDR4 3200 8GB 1.2v 1Gx8  |
| SQR-SD4I16G3K2SNCB | DDR4 3200 16GB 1.2v 1Gx8 |
| SQR-SD4I32G3K2SNAB | DDR4 3200 32GB 1.2v 2Gx8 |

## M.2 2280 NVME SSD

| Part Number        | Description   |
|--------------------|---|
| SQF-C8BV2-128GDEDM | SQF PCIe/NVMe M.2 2280 OPAL 720-D 128G 3D TLC BiCS5 |
| SQF-C8BV2-256GDEDM | SQF PCIe/NVMe M.2 2280 OPAL 720-D 256G 3D TLC BiCS5 |
| SQF-C8BV2-512GDEDM | SQF PCIe/NVMe M.2 2280 OPAL 720-D 512G 3D TLC BiCS5 |

## 2.5" SATA SSD and Mounting Kit

| Part Number        | Product Description           |
|--------------------|-------------------------------|
| AMF-S25V2-256GDSBC | AMF 2.5" 256GB 3D TLC (BiCS5) |
| AMF-S25V4-512GDSBC | AMF 2.5" 512GB 3D TLC (BiCS5) |
| AMF-S25V4-1TDSBC   | AMF 2.5" 1TB 3D TLC (BiCS5)   |

| Part Number    | Part Description |          | Oty |
|----------------|------------------|----------|-----|
| 1700033584-01  | SATA Cable       |          | 1   |
| 1700033596-01  | SATA Power Cable | \        | 1   |
| 1960097062N001 | SSD Bracket      |          | 1   |
| 19330304A0     | Screw            | <b>*</b> | 2   |
| 1930001361     | Screw            |          | 2   |
| 193A231560     | Pillar           | 5        | 2   |
| 1940003234     | Gasket           |          | 1   |

## Wi-Fi + BT Module

| Part Number   | Description                                |
|---------------|--|
| EWM-W165M201E | Intel® Dual Cond Movelage AVO10 (Mi. Fi.C) |
| EWM-W165M203E | Intel® Dual Band Wireless-AX210 (Wi-Fi 6)  |

## **Power Cord**

| Region                      | Part Number (DC Model) |
|-----------------------------|------------------------|
| USA (Thailand, Philippines) | 1702002600             |
| Europe (Indonesia)          | 1702002605             |
| UK (Singapore, Malaysia)    | 1700018704             |
| Japan (PSE)                 | 1700000237             |

## **Accessories**

## **Backup Battery (Internal)**



# **Battery Pack Specification**

| Battery Pack Type     | ithiui )-ion battery      |
|-----------------------|---------------------------|
| Battery Pack Capacity | 90vv11                    |
| Total Capacity        | <b>⊙</b> 0Wh              |
| Battery Runtime       | 3~4hrs                    |
| Battery Lifesna.      | 300 cycle time ≥ 70%      |
| Capacity Indicator    | LED indicator with button |
| Weig'a                | 540g/1.2lb                |

<sup>\*</sup>Backup hatery is 1 piece.

## **Cattery Module**

| Part Number     | Description               |
|-----------------|---------------------------|
| POC-BAT-101-6A* | Backup battery (internal) |

## **Recommended Mounting Solution**

| Model Name              | ARES-2423R               |
|-------------------------|--------------------------|
| Part Number             | ARES-2423R-A741L00       |
| Photo                   |                          |
| Max. Support Weight     | 6 - 12kg                 |
| Max. Support Panel Size | ≤ 27"                    |
| VESA Information        | 75 x 75 mm<br>100x100 mm |

For more information, please clink this link: https://bit.ly/3T7dLMR

# **DeviceOn**

## **Unified Remote Device Management** Software



## **Features**

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

## Introduction

Advantech's DeviceOn is a next-generation unified device management solution based on the WISE-DeviceOn , Palor n. Designed to enable centralized monitoring and remote management, DeviceOn supports Advantech devices equipped with Windows, Linux, or Android operating sy ter 3 me software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access a decontrol connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, Deviceous supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

## **Total Management**



#### **Devices & Hardware**

- Windows, Linux, Android
- Hardware, storage, battery



## **Software & Peripherals**

- Software monitoring & access
- Screens, USB devices, proters

Remote Acces



#### Real-Time Monitoring

- Connection/hardware status
- Software/peripheral status
- Failure notifications

# OTA

#### **OTA updates**

**Operational Efficiency** 

- System/software updates
- File repository management
- App store



### **Remote Controls**

- Power controls
- Audio, backlight controls
- Software controls



#### **Batch Controls**

- 1-to-many batch reboot, etc.
- Time-saving tasks



### **Open for Expansion**

- Peripheral integration
- Open APIs for integration



### **Troubleshooting**

- Screenshots
- Remote desktop support



## **Setup Booster**

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

## **System Architecture**



## **DeviceOn Specifications**

|                                      | Operating System                            | Windows 10   |
|--------------------------------------|---|--------------|
|                                      | Common Controls (Reboot, Shutdown)          | ✓            |
|                                      | Remote desktop                              | ✓(VNC)       |
|                                      | Device-Specific Controls (Audio, Backlight) | <b>√</b> *   |
|                                      | Connection Status                           | ✓            |
| Device On Demote Device              | Hardware Status                             | <b>√</b> *   |
| DeviceOn Remote Device<br>Management | Hard Disk Status                            | <b>√</b> *   |
| Management                           | Batch Operation Support                     | $\checkmark$ |
|                                      | OTA Storage Management                      | FTP          |
|                                      | OTA Software Updates                        | ✓            |
|                                      | Software Watchlist                          | ✓            |
|                                      | Software Start/Stop                         | <b>√</b> *   |
| * Dependant on device model          | Peripherals Watchlist                       | <b>√</b> *   |

Note:

<sup>1.</sup> DeviceOn software must be downloaded from the Advantech website at https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility