


# ASMB-977

## Dual 5th/4th Gen Intel® Xeon® Scalable Server Board with 16x DDR5, 5x PCIe x16, 9x SATA 3, 4x USB 3.2 (Gen 1), Dual 10GbE, and IPMI

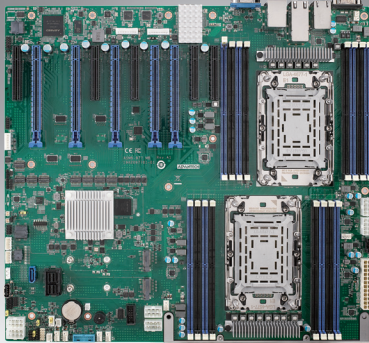

### Features

- LGA4677 server board with 5th/4th Gen Intel® Xeon® scalable processor
- DDR5 5200 MHz RDIMM up to 4TB (16 DIMMS)
- Features 5x PCIe x16 and 5x PCIe x8
- Intel® X710-AT2 dual 10GbE ports
- Nine SATA 3 and two M.2 connectors (SATA/PCIe compatible)
- 0 ~ 40 °C ( 32 ~ 104 °F) ambient operating temperature range

### Specifications

CE FCC


Form Factor	Proprietary		
Processor System	Socket	Dual Intel® LGA4677 (Socket E)	
	CPU type	5th/4th Gen Intel Xeon Scalable processors (CPU cooler should be purchased separately*)	
Core Logic	Chipset	Intel® C741 chipset	
Memory	Total slots	16x (1 DIMM per channel)	
	Capacity	Maximum 4TB ECC RDIMM	
	Memory type	DDR5 ECC-REG 4400/4800/5200 MHz RDIMM	
	Memory size	16GB, 32GB, 64GB, 128GB, 256GB	
Expansion Slots	Total PCIe slots	10	
	Slot location 1	PCIe x 8 slot (Gen4 x8 link), signal from CPU0	
	Slot location 2	PCIe x 16 slot (Gen5 x16 link), signal from CPU0, CXL support**	
	Slot location 3	N/A	
	Slot location 4	PCIe x 16 slot (Gen5 x16 link), signal from CPU0, CXL support**	
	Slot location 5	PCIe x 8 slot (Gen4 x8 link), signal from CPU1	
	Slot location 6	PCIe x 16 slot (Gen5 x16 link), signal from CPU0, CXL support**	
	Slot location 7	PCIe x 8 slot (Gen4 x8 link), signal from CPU1	
	Slot location 8	PCIe x 16 slot (Gen5 x16 link), signal from CPU1, CXL support**	
	Slot location 9	PCIe x 16 slot (Gen5 x16 link), signal from CPU1, CXL support**	
	Slot location 10	PCIe x 8 slot (Gen4 x8 link), signal from CPU1	
Slot location 11	PCIe x 8 slot (Gen4 x8 link), signal from CPU1		
Graphics	VGA	speed AST 2600	
Storage	SATA controller	Intel® C741: 8 x SATA3.0 (6 Gb/s) via Mini SAS HD (SFF-8643), support software RAID 0,1,5,10	
	SAS controller	1 x SATA3.0 (6 Gb/s)	
Networking	GbE/10GbE LAN	2 x Intel® I210AT / Intel® X710-AT2 (dual 10GbE ports)	
	SAS controller	-	
Onboard I/O	PSU connector	24-pin SSI power connector + 6 x 8-pin SSI 12 V power connector***	
	USB connector	2 x USB 3.2 Gen 1 ports (one onboard header) + 1 x Type-A USB 2.0 port	
	Fan header	7 x 4-pin (2 for CPU + 5 for system) + 2 x 8-pin (for external rear fan)	
	M.2	1 x M.2 2242/2280 B+M key (SATA and PCIe) + 1 x M.2 2242/2280 B+M key (PCIe)	
	SMBus	1	
	Chassis intrusion	1	
	Front LAN LED	1	
	Audio Header	1	
Rear I/O Connector	PS/2 Keyboard/Mouse header	1	
	Serial port header	1	
	External serial port	1	
	External USB port	2 (USB 3.2 Gen1)	
	VGA port	1	
	RJ-45	5 (1 port dedicated for IPMI function) for T2 SKU/3 (1 port dedicated for IPMI function) for I SKU	
Management Solution	PS/2 KB/mouse	-	
	Infiniband	-	
Monitoring	Software	-	
	Out of band remote management	Yes	
Watchdog Timer	CPU temperature	Yes	
	System monitoring	Yes	
Power Requirements	Output	System reset	
	Interval	Programmable 1 ~ 255 sec/min	
Environment	Power On	3.3V      5V      12V      5Vsb      -12V      8P_CPU0      8P_CPU1	
	(205W CPU@1.6GHz DDR5 4800 64G*16)	2.43A      1.76A      18.12A      1.54A      0A      16.29A      13.91A	
Physical Characteristics	Operating	Non-operating	
	Temperature	0 ~ 40 °C (32 ~ 104 °F), depends on CPU speed and cooler solution	-40 ~ 85 °C (-40 ~ 185 °F)
	Humidity	10% ~ 95%	10% ~ 95% (Non condensing)
	Dimensions (L x H)	380 x 349.5 mm (14.96" x 13.76")	

\*CPU power design support up to 270W TDP.

\*\*CXL 1.1 Type 1 and Type 2 device.

\*\*\*Please connect all 8-pin CPU PWR Conn. (ATX12V1/ ATX12V2/ ATX12V3/ ATX12V4) when using dual CPU both up to 205W TDP.

## Block Diagram

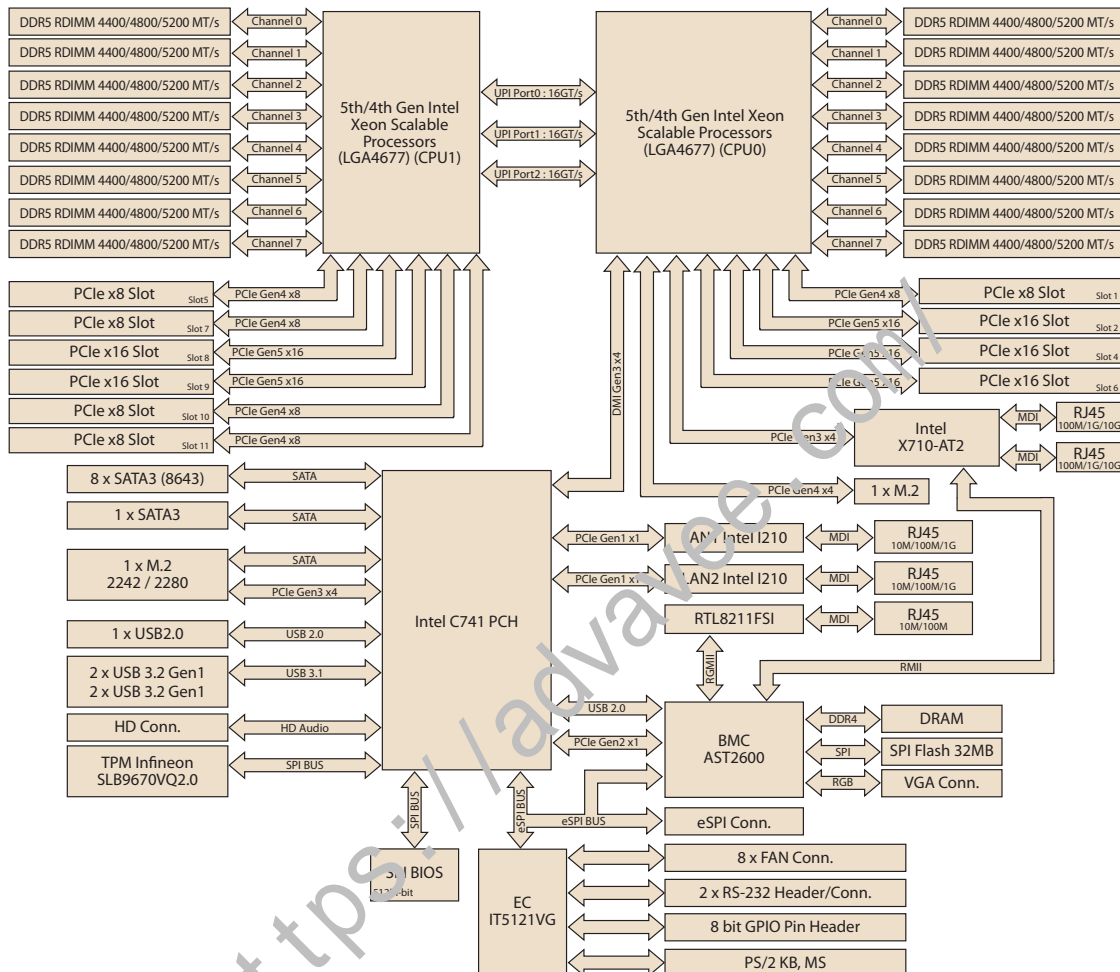

## Ordering Information

Part Number	Chipset	Memory	GbE/10GbE LAN	IPMI	Graphics
ASMB-9771-00A1	C741	16 x DDR5 RDIMM	2/-	Yes	AST 2600
ASMB-977T2-00A1	C741	16 x DDR5 RDIMM	2/2	Yes	AST 2600

## Packing List

Part Number	Description	Quantity
2042097700	Startup manual	x 1
1700003194	SATA data cables	x 1
1700022749-11	SATA power cables	x 1
1700019748	CPU power cable	x 2
1930008364	Screw for M.2 device	x 1
1960093947T002	I/O shield	x 1
1651003738-01	LGA4677 CPU carrier - E1A (XCC)	x 2
1651003739-01	LGA4677 CPU carrier - E1B (MCC)	x 2

## Optional Accessories

Part Number	Description
PCA-AUDIO-HDB1E	HD Audio-card
1970005860N000	LGA4677 CPU cooler for 2U/4U chassis (270W)
1700028024-01	Dual port USB 3.2 (Gen1) cable (45 cm/ 17.7 in) with bracket
1701090401	Single port RS-232 COM cable (40 cm / 15.7 in) with bracket
1700019268-11	Cable for onboard KBMS1 connector (35 cm/ 13.7 in)
1960063434N000	Cable bracket for 1700019268-11

Note:

1. PCA-AUDIO-HDB1E is not compatible with 3U chassis.
2. Select SATA cable (SFF-8643) from HPC chassis datasheet or contact sales representative.

## I/O View



ASMB-9771-00A1



ASMB-977T2-00A1