


Dual Port Fiber 100GbE Ethernet PCI Express Server Adapter with NVIDIA® ConnectX®-6



Features

- NVIDIA® ConnectX®-6 Dx Controller
- 2 100GbE QSFP56 ports
- PCIe Gen. 4 x16 host interface
- Low profile (half length) form factors
- Supports 100GBASE-SR4, 100GBASE-CR4 and 100GBASE-KR4 modules
- Supports SR-IOV based virtualization

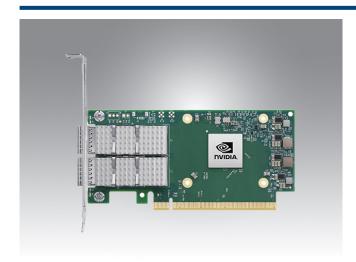

Introduction

The PCIE-2421 built on NVIDIA® is a low-profile dual port 100GbE Ethernet smart network interface cards (Smr.;"IC, har ed on the NVIDIA® ConnectX®-6 Dx Ethernet Controller that supports PCIe gen. 4. The SmartNIC supports up to two QSFP56 ports of 100GbE connectivity to deliver scalar "y, i gh performance, advanced security capabilities, and accelerated networking. With an SR-IOV or VirtIO interface, NVIDIA Accelerated Switch and Packet Processing technology (AsAP) offloads the software-defined networking (SDN) data plane to the SmartNIC, accelerating performance and offloading the CPU in virtualized or containerized cloud a "ta cemers."

PCIE-2421 is an ideal network interface solution for Enterprise data centers with Big data analytics, C or J-native, web 2.0, hyperscale, Cybersecurity, network function virtualization (NFV), Machine learning and Al.

Specifications

Controller	Controller	NVIL IA® Co. nectX®-6 Dx
	Physical Functions	8
	Virtual Functions	1K
Ethernet	PCI Express Lanes	x16 *
	Speed	uen 4
	Port Number	2
	Ports	100GbE QSFP56
Networking	LAN Bypass	Not supported
Power	Voltage	+12V
	Watts	20W
Mechanical Design	Board Dimension (D x W)	142 x 68.9 mm
	Bracket	Full height and half height options available
Environment	Operating Humidity	0 to 90% (non-condensing)
	Operating Temperature	0 ~ 55 °C (32 ~ 131 °F)
	Storage	-40 ~ 70 °C (-40 ~ 158 °F)
Certification	EMC	CE/FCC/VCCI/ICES/RCM
Compatibility	OS Version	Win2022 / Win2019 / Win2016 / Win2012R2 / Win11 x64 / Win10 x64 / RedHat / CentOS

Ordering Information

Part Number	Description
PCIE-2421NP-MEA1E	Dual Port Fiber 100GbE (QSFP56) Ethernet PCI Express Server Adapter with NVIDIA® ConnectX®-6 controller, PCIe gen. 4 x16

Please contact your Advantech representative for a list of supported and validated transceiver modules.