


ZX10 FULLY RUGGED TABLET



- Qualcomm® QCS6490, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology (1,000 nits) and glove-enabled capacitive touchscreen
- Dual hot-swappable batteries for uninterrupted operation
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Multiple configurations with enterprise-level management tools in a light form factor
- Verified as Android enterprise recommendedⁱ

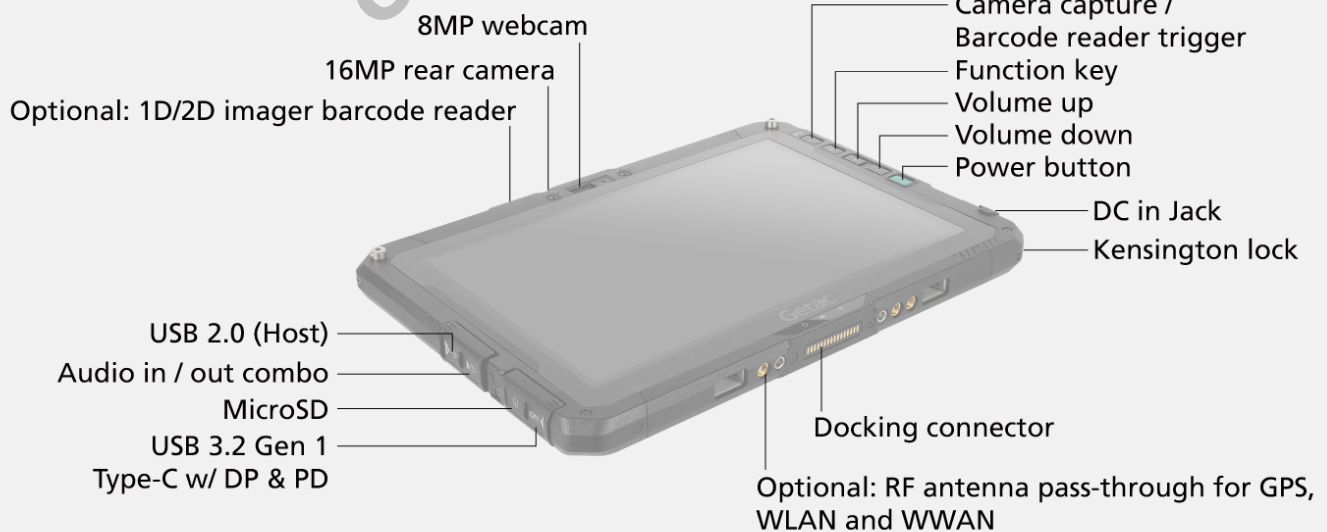

SPECIFICATIONS

Operating System

Android™ 13.0ⁱ

Mobile Computing Platform

Qualcomm® QCS6490, Octa-core 1.9GHz
Max. 2.7GHz

VGA Controller

Qualcomm® Adreno™ 643 GPU

NPU

Qualcomm® Hexagon™ Processor,
up to 13 TOPS with 6th Qualcomm AI Engine

Display

10.1" TFT LCD WUXGA (1920 x 1200)
Protection film
1,000 nits LumiBond display with Getac sunlight readable
technology
Capacitive multi-touch screen

Storage & Memory

8GB LPDDR5

128GB UFS

Optional: 256GB UFS

Device Button

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: NFCⁱⁱ

I/O Interface

8MP webcam x 1
16MP auto focus rear camera x 1
Audio in/out combo x 1
USB 2.0 (Host) x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
MicroSD x 1
Docking connector x 1
Optional: SIM card slot x 1 (Nano-SIM, 4FF)
Optional: RF antenna pass-through for GPS and WWAN

Communication Interface

Wi-Fi 6E 802.11ax
Bluetooth (v5.2)ⁱⁱⁱ
Optional: Dual SIM (Nano-SIM 4FF and e-SIM)^{iv}
Optional: 4G LTE mobile broadband^{iv}
Optional: 5G Sub-6^{iv}
Optional: Dedicated L1/L5 GPS^v

Security Feature

Kensington lock
Optional: NFCⁱⁱ
Optional: Smart card reader

Power

Li-ion battery (3.88V, typical 4990mAh; min. 4870mAh)
+ Battery bay cover
LifeSupport battery swappable technology

Swappable Battery Options:

1. Battery (3.88V, typical 4990mAh; min. 4870mAh) x 2
2. High capacity battery
(3.88V, typical 9980mAh; min. 9740mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8 " x 7.56" x 0.7")
906g (1.99lbs)^{vi}

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)

Environmental Specification

Temperature^{vii}:
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac settings and Google applications (Search, Chrome,
Gmail, Maps, YouTube, Play, Drive, YouTube music,
Google TV, Meet and Photos)
Getac Log Tool
Getac Diagnostic
Getac Monitoring (trial version) agent/SDK^{ix}
Getac Management (trial version) agent/SDK^{ix}

Optional software

Getac Driving Safety Utility
Getac Monitoring^{ix}
Getac Management^{ix}
Getac OEMConfig^{ix}

Accessories

Battery (3.88V, typical 4990mAh; min. 4870mAh)

Optional:

Carry bag
High capacity battery
(3.88V, typical 9980mAh; min. 9740mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
65W USB-C AC adapter
DC-DC vehicle adapter (65W, 22-32VDC)
Capacitive stylus with tether
Digitizer pen with tether
Protection film
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Hard handle
Office dock
Vehicle dock^{viii}
Keyboard dock

Bumper-to-Bumper warranty

Accidents can take your equipment out of
service when you least expect it, especially in a
rugged environment, which can cause costly
equipment downtime. That is why Getac has
introduced accidental damage as standard
under our Bumper-to-Bumper warranty, to help
minimize your enterprise IT costs. Bumper-toBumper
is your hassle-free guarantee. That
means you can depend on us to have your unit
back in service within days. Standard 3 years

Standard

3 years Bumper-to-Bumper

ZX10 FULLY
RUGGED TABLET

- I. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- II. 13.56MHz contactless NFC (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- IV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- V. Support GPS, GLONASS, Galileo and BeiDou. Only available in the US, UK, EU, Australia and New Zealand.
- VI. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 140g.
- VII. When using AC power, the device operates in temperatures as low as -29°C (-20°F), as tested by an independent third-party laboratory following MIL-STD-810H standards. For battery-only operation, it functions down to -15°C (5°F) with one standard battery, -21°C (-6°F) with two standard batteries, and -29°C (-20°F) with two high-capacity batteries.
- VIII. Gamber Johnson and Havis vehicle docks are e-mark certified.
- IX. Compatibility begins in April 2025.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock (Pogo)
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	USB 2.0 x 2	USB 2.0 x 3
LAN	-	1
HDMI	-	1
RF Pass-through	Optional: RF antenna connector x 3 (GPS, WWAN, WLAN)	-
Kensington Lock	-	Kensington Lock x 1

Getac